






Versatility that adapts to your
needs, **reliability** that endures

Learn more
inetictraction.com

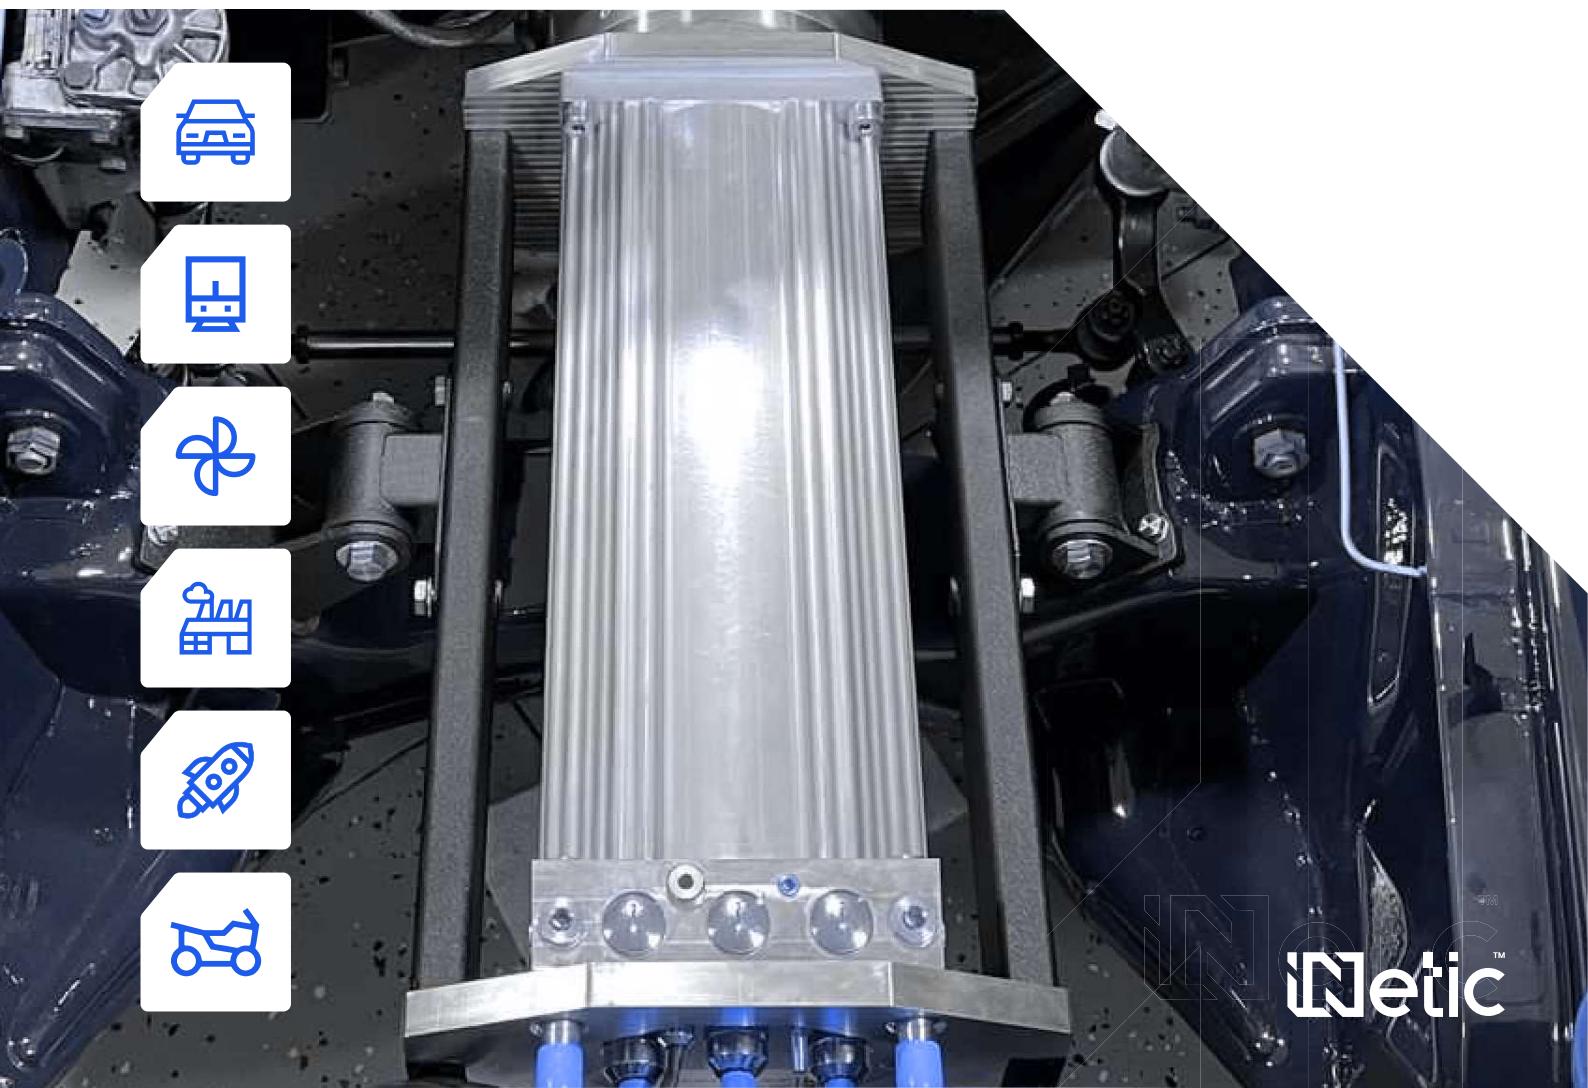

iN
Netic™

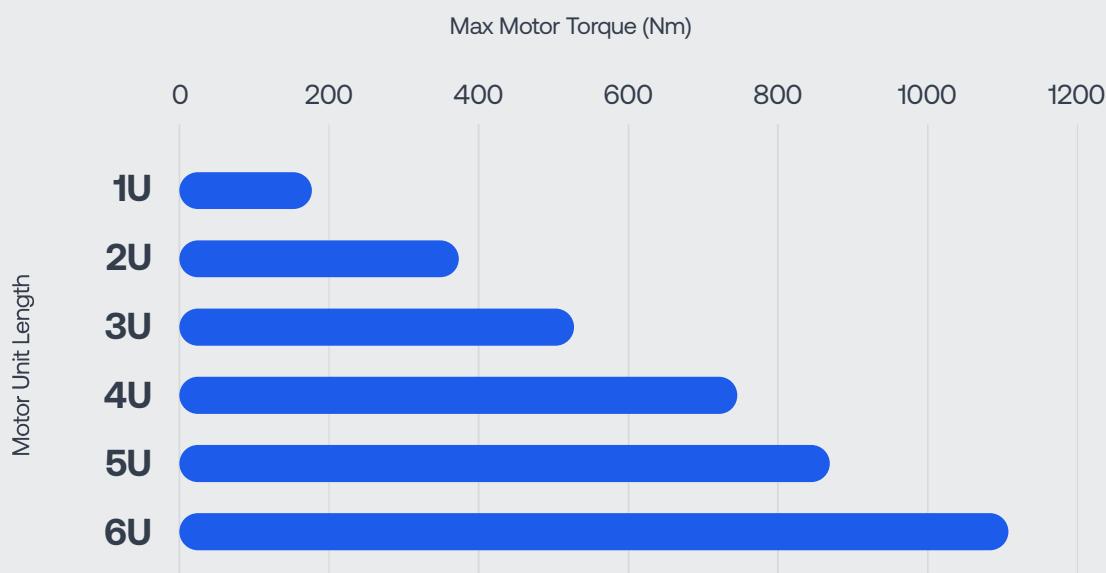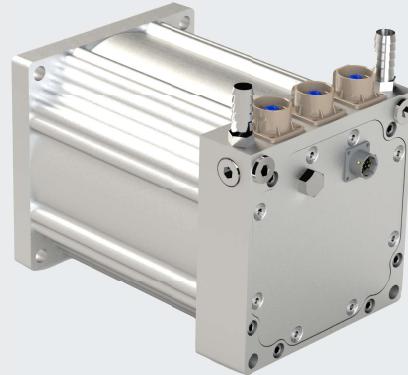


The iEV180 motor range is a cutting-edge high-speed electric motor designed to cater primarily for the automotive industry, while also finding applications in marine, power generation, industrial, and other sectors. With an impressive speed of 18,000pm, this motor offers exceptional performance and efficiency.

One of the key strengths of the iEV180 motor range is its versatility. It comes in multiple power ranges, allowing it to be customized to meet specific requirements across various industries. Additionally, the motor offers flexibility in terms of coolant and power connection configurations, ensuring seamless integration into different systems and applications.

The design of the iEV180 motor range has been developed to be robust and optimized for high-volume production. This makes it an ideal choice for manufacturers looking for reliable and scalable solutions for their electric vehicles or industrial projects.


Characteristics

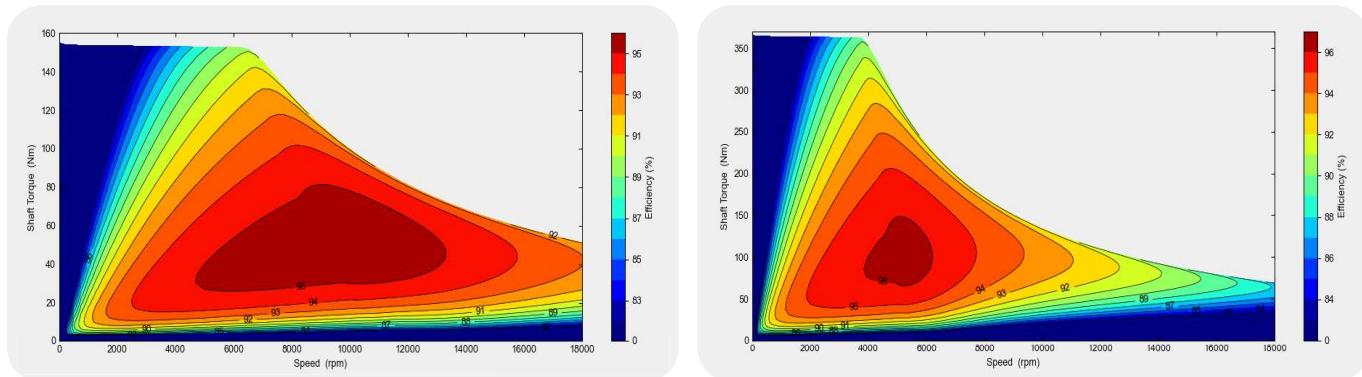

Electrical Specification		Unit		
Motor / Generator Type			3-Phase Radial Synchronous Flux Permanent Magnet Motor/Generator	
Applications			Automotive Motorsport, Off-Highway, Motorcycle, Passenger Vehicle, Commercial Vehicle, Rail, Marine and Power Generation	
DC Voltage (Motor)	VDC		850	
Maximum Phase Current (Motor)	Arms		>700	
Rotor Position Sensor			Resolver	
Performance Specification		Unit	iEV180-2U-WN200	iEV180-4U-WN200
Peak Torque (for 10s)	Nm		166	355
Peak Power (for 10s)	kw		105	135
Continuous Torque (30 min)	Nm		68	156
Continuous Power (30 min)	kw		64	59
Torque Density Peak	Nm/kg		5.7	6.8
Power Density Peak	kW/kg		3.6	2.6
Mechanical Specification		Unit	iEV180-2U-WN200	iEV180-4U-WN200
Cross section dimension	mm		180 x 180	
Package Length (excluding splined shaft)	mm		256	381
Mass	kg		29.0	52.0
Maximum speed	rpm		18,000	
Axial/Radial Shaft Load	N		100 N axial 200 N radial	
Shaft Output			External Spline, Internal Spline, Plain Shaft or Single Keyways	
Ingress Protection	IP		IP67	
Motor Connection Type			Powerlok Connectors	
Cogging Torque	Nm		<3%	
Thermal Specification		Unit	iEV180-2U-WN200	iEV180-4U-WN200
Cooling method			Liquid cool, 50% Ethylene Glycol	
Coolant Inlet Temperature	°C		-10 to +75	
Coolant Inlet Pressure	bar (guage)		0.5 - 3.0	
Coolant Pressure drop across motor	barG a 10l/min		0.B	
Maximum stator winding temperature	°C		180	
De-rate stator winding temperature	°C		165	
Temperature sensor	-		PT1000	
Ambient Temperature	°C		-20 to 45	

NOTE: 1) Mass: excludes cables or coolant tubes, 2) Peak Values are simulated using 400VDC and 410Arms, 3) Continuous values are simulated using 400 VDC, 70 C Inlet Temperature and 10 Lpm coolant flow rate, 4) Data for lower voltages and current levels are available upon request.

Mechanical Overview

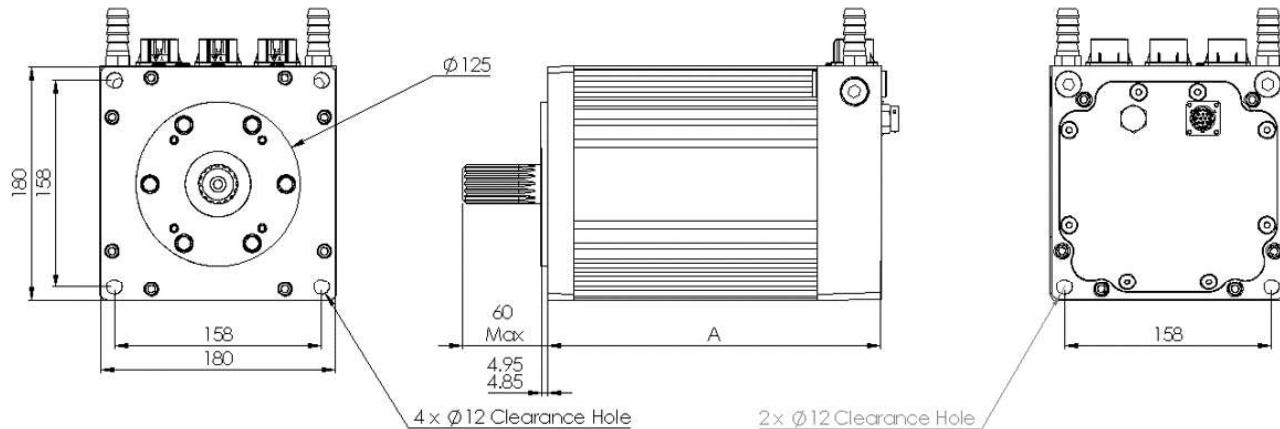

Pressure Drop Data

	Flow Rate (L/min)	5	10	15	20
Pressure Drop (Bar)	1U	0.19	0.32	0.46	0.74
	2U	0.19	0.33	0.48	0.76
	3U	0.20	0.34	0.49	0.78
	4U	0.20	0.35	0.50	0.80
	5U	0.21	0.36	0.51	0.82
	6U	0.21	0.37	0.53	0.84

The table displays the pressure drop within the iEV180, considering an inlet temperature of 70°C and utilizing a coolant composed of a 50/50 water-glycol mixture.

Explore inetictraction.com to design your drive system with multiple configurations, matched controllers and gearboxes.